

06-05-00

IN THE U.S. PATENT AND TRADEMARK OFFICE
Patent Application Transmittal LetterASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): Utility Design original patent application, continuation-in-part application1C583 U.S. PRO
09/585261

06/02/00

INVENTOR(S): Kah Phang LOH

TITLE: Circuit Board Assembly

Enclosed are:

The Declaration and Power of Attorney. signed unsigned or partially signed

9 sheets of drawings (one set) Associate Power of Attorney

Form PTO-1449 Information Disclosure Statement and Form PTO-1449

Priority document(s) () (Other) (fee \$ _____)

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	12 — 20	0	X \$18	\$ 0
INDEPENDENT CLAIMS	5 — 3	2	X \$78	\$ 156
ANY MULTIPLE DEPENDENT CLAIMS	0		\$260	\$ 0
BASIC FEE: Design \$310.00 ; Utility \$690.00				\$ 690
TOTAL FILING FEE				\$ 846
OTHER FEES				\$
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 846

Charge \$ 846 to Deposit Account 50-1078. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 50-1078 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 50-1078 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EL525782103 US

Respectfully submitted,

Date of Deposit June 2, 2000

Kah Phang LOH

By Herbert R. Schulze

Herbert R. Schulze

Attorney/Agent for Applicant(s)

Reg. No. 30,682

Date: June 1, 2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

By Leonor S. Tuck

Typed Name: Leonor S. Tuck

Telephone No.: (650) 857-4377

CIRCUIT BOARD ASSEMBLY

5 This invention relates generally to circuit board assemblies. In particular, the invention relates to assemblies of circuit boards and optical transceiver modules.

BACKGROUND OF THE INVENTION

Infrared transceivers modules are often incorporated into electronic devices to 10 enable bi-directional wireless communication with other electronic devices. For example, it is known for a portable digital assistant (PDA) to communicate with a laptop computer, a printer, or another PDA via a standard Infrared Data Association (IrDA) link. Similarly, IR transceivers are becoming increasingly 15 popular for use in hand-portable telephones, enabling telephone users to swap stored numbers, play wirelessly-linked games, or wirelessly link their telephones to IR-enabled accessories.

The advantages of using an IR link over standard electrical connectors are 20 numerous and well documented. These advantages include: 1) greater alignment tolerance; 2) the ability to hermetically seal the data interface; 3) no cables susceptible to RF interference; and 4) no electro-magnetic compatibility (EMC) issues.

An IR transceiver module typically comprises a light emitting diode (LED) and a 25 photodiode, packaged together with appropriate supporting circuitry to form a self-contained unit. Electrical terminals are exposed on the outside of the package to enable the module to be electrically coupled to external circuitry.

By combining the various components of an IR transceiver into a single package 30 or module, the size or form-factor of the transceiver system can be considerably reduced. Furthermore, the modules tend to be more durable and often consume less power than equivalent transceivers consisting of discrete components.

When an IR link or communication channel is created between two IR transceiver modules, the LED in the first transceiver optically couples with the photodiode in the second transceiver, and the LED in the second transceiver optically couples with the photodiode in the first transceiver. Although the transceivers typically operate in the infrared optical frequency band it is equally possible for other optical frequency bands to be used in forming the communication channel.

Figure 1 shows a prior art hand-portable telephone 100, such as the Model 6110 cellular telephone available from Nokia Mobile Phones Oy, Finland, which incorporates a known IR transceiver module (not shown). The telephone includes a standard keypad 110, a display 120, and an antenna 130. The telephone housing 140 encloses circuitry including a IR transceiver module positioned adjacent an IR transparent window 150. The window is transparent to IR radiation enabling the IR transceiver module to communicate optically with other devices outside the housing 140.

Figure 2 is a more detailed view of the internal circuitry of the hand-portable telephone of Figure 1, showing the IR transceiver module 200 mounted on an end portion of a main printed circuit board (PCB) 250. The transceiver module 200 is formed with a first molded lens shape 210 over the LED and a second molded lens shape 220 over the photodiode. Leads 230 provide mounting supports and electrical interconnections between the IR transceiver 200 and the printed circuit board 250. A typical length "L" for the IR transceiver body is approximately 10mm, a typical depth "D" is 5mm, and a typical height "H" is 4mm. A typical thickness "T" for the printed circuit board 250 is 1mm.

Consumer pressure is driving electronic device manufacturers such as radio telephone manufacturers to produce ever slimmer products. One way to help reduce the thickness of these products is to minimising the thickness of printed circuit boards contained in the products. Components mounted on the printed circuit boards contribute to the overall circuit board thickness. Therefore, by reducing the height of components on the circuit board, the circuit board thickness

may be reduced which in turn can enable slimmer products to be manufactured. Excessive height above a circuit board can thus be a problem for components.

5 One solution for reducing the height of components on a circuit board is to simply use smaller components. Components are now available which when mounted directly on a circuit board stand less than 1mm from the board surface. However, for components with optical lenses such as infrared transceiver modules, the module height is limited by the diameter of the lens. The lenses must be of a 10 minimum size to ensure adequate performance of the IR transceiver and to satisfy legislated eye safety requirements (lenses smaller than the minimum size can concentrate light emitted from the transceiver to dangerous levels). Some manufacturers have overcome the lens size limitation by cutting off small portions from each lens. This approach again leads to a degradation in the performance of 15 the IR transceiver. The smallest IR transceiver module currently available has a height of 2.5mm.

Another solution for reducing the height of components on a circuit board is disclosed in US Patent 5,506,445, assigned to Hewlett-Packard Company, USA. 20 Figures 3 and 4 illustrate this solution which involves mounting a leadframe IR transceiver adjacent an end surface of a printed circuit board by means of a series of shaped leads 230. An alternative lead arrangement adopted by one manufacturer, Vishay Company, USA, is shown in Figure 5. This solution has drawbacks. Firstly, the leads on these packages need to be long enough to enable 25 them to correctly attach to the circuit board. However, long leads cause coplanarity problems which in turn causes a high percentage of products to fail during manufacture. Secondly, the complex arrangement of the leads makes lead trimming difficult and expensive to achieve during manufacture. Thirdly, the lack of a surface on which the IR transceiver body is supported results in an inherently 30 unstable device assembly. Alternating motion stresses are concentrated directly on the solder joints coupling the IR transceiver module to the printed circuit board. An additional problem which the applicant has found in practice is that the IR transceiver does not lend itself to automated assembly. The complex alignment

and a lack of pick and place surface mean that manual assembly is necessary for this type of product.

The foregoing illustrates that there is need for a low profile optical transceiver

5 which overcomes the drawbacks associated with the prior art.

SUMMARY OF THE INVENTION

The present invention provides a system for assembling a circuit board and an

10 optical transceiver module, in which the optical transceiver module is mounted onto an additional substrate. The additional substrate allows the optical transceiver module to be placed within an open slot of the main circuit board, thus reducing the effective height of the module from the circuit board surface. Suitably, the additional substrate provides electrical interconnections between the optical 15 transceiver module and the circuit board.

According to a first aspect, the present invention provides a circuit board assembly comprising; a planar circuit board having a major surface and a side surface, a planar substrate mounted on the major surface of the circuit board, an extended

20 portion of the planar substrate extending beyond the side surface, and an optical transceiver module mounted on the extended portion of the substrate adjacent the side surface of the printed circuit board.

According to a second aspect, the present invention provides a circuit board

25 assembly comprising; a planar circuit board having a major surface, and a side surface defining a recess, a planar substrate mounted on the major surface of the circuit board, an extended portion of the planar substrate extending over the recess, and an optical transceiver module mounted on the extended portion of the substrate so as to be disposed in the recess.

30

According to a third aspect, the present invention provides an optical transceiver module package for mounting on a planar circuit board having a major surface and a side surface, the major surface provided with electrical terminals, the optical

transceiver module package comprising: a planar substrate for mounting on the major surface of the circuit board so that an extended portion of the planar substrate extends beyond the side surface, an optical transceiver module provided with electrical terminals and mounted on the extended portion of the substrate

5 adjacent the side surface of the printed circuit board, and electrically conductive interconnects associated with the planar substrate for coupling the electrical terminals on the optical transceiver module with electrical terminals on the planar circuit board.

10 According to a fourth aspect, the present invention provides an optical transceiver module package for mounting on a planar circuit board having a major surface and at least one side surface defining a recess, the major surface provided with electrical terminals, the optical transceiver module package comprising: a planar substrate for mounting on the major surface of the circuit board so that an extended portion of the planar substrate extends over the recess, and an optical transceiver module provided with electrical terminals and mounted on the extended portion of the substrate so as to be disposed in the recess, and electrically conductive interconnects associated with the planar substrate for coupling the electrical terminals on the optical transceiver module with electrical terminals on the planar circuit board.

15

20

A circuit board assembly or optical transceiver module package in accordance with the invention has the advantage that the optical transceiver module is mounted on a planar substrate instead of the circuit board, which avoids the optical transceiver module protruding directly from the circuit board surface. Consequently, the effective height of the optical transceiver module can be reduced by at least the thickness of the circuit board, allowing the module to protrude or extend less from the from the circuit board surface. Thus, the overall thickness of the circuit board assembly can be reduced.

25

30 The optical transceiver module package which includes the planar substrate in accordance with the present invention also has the advantage that it can be assembled with the circuit board using a standard pick and place machine.

Suitably, the planar substrate provides a surface from which the pick and place machine can hold and manoeuvre the optical transceiver module package.

In a preferred embodiment, the planar circuit board includes an end portion defining a recess in which the optical transceiver module is disposed. In accordance with another aspect of the invention, a side surface of the circuit board may define the recess. This side surface may be a single continuous surface defining the recess or a multi-faceted surface made up of a two or more joined panels defining the recess.

10

Ideally, the planar substrate includes electrically conductive interconnects for coupling electrical terminals on the optical transceiver module with electrical terminals on the planar circuit board.

15 According to a fifth aspect, the present invention provides a method of manufacturing a circuit board assembly comprising: providing a planar substrate, mounting an optical transceiver module on a first portion of the planar substrate, and mounting a second portion of the planar substrate on a major surface of a circuit board such that the optical transceiver module is disposed adjacent a side 20 surface of the planar circuit board.

A method in accordance with the invention has the advantage that it enables the optical transceiver module to be packaged together with the planar substrate for subsequent mounting on the planar circuit board, which in turn enables the optical 25 transceiver module to be reliably packaged prior to mounting on the circuit board. The optical transceiver module package can be manufactured on a large scale, and each package can then be reliably mounted on the circuit board. Pick and place machines can be used advantageously to hold and manoeuvre the optical transceiver module package during mounting on the circuit board.

30

In a preferred method in accordance with the invention, the planar substrate is separated from a relatively larger planar substrate using a singularising step.

Preferably, a multitude of planar substrates are singularised from the larger planar substrate, with each planar substrate including an optical transceiver module.

5 Embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of a prior art hand-portable telephone;

10 Figure 2 is a perspective view of the internal circuitry of the hand-portable telephone of Figure 1.;

Figure 3 is a perspective view of a prior art leadframe IR transceiver mounted adjacent an end surface of a printed circuit board;

15 Figure 4 is a cross-sectional side view of the transceiver of Figure 3;

Figure 5 is a cross-sectional side view of an IR transceiver similar to that of Figure 3 with an alternative lead arrangement;

20 Figure 6 is a perspective view of a optical transceiver module package in accordance with the invention;

25 Figure 7 is a plan view of a large planar substrate from which multiple optical transceiver module packages may be singularised;

Figure 8 is a perspective view of the optical transceiver module package of Figure 6 prior to assembly on an end portion of a circuit board;

30 Figure 9 is a perspective view similar to Figure 8 with the optical transceiver module package assembled with the circuit board;

Figure 10A is a side cross-sectional view of the circuit board assembly of Figure 9;

Figure 10B is a plan view of the printed circuit board assembly of Figure 9;

OPTICAL TRANSCEIVER MODULE PACKAGE

5

Referring to Figure 6, there is shown an optical transceiver module package 300 which can be mounted onto a main printed circuit board (PCB) of a portable telephone or any other suitable electronic apparatus to enable the apparatus to communicate optically with other electronic devices. The package 300 comprises
10 an optical transceiver module 400 surface mounted on a planar substrate 500. The optical transceiver module 400 is preferably an infrared transceiver module, such as the HSDL-3201 model infrared transceiver available from Agilent Technologies Inc., USA. The planar substrate can be rigid or flexible with a thickness preferably less than that of a standard circuit board.

15

The optical transceiver module 400 is formed with a first molded lens shape 410 over a light emitting diode (LED) and a second molded lens shape 420 over a photodiode. A series of electrical terminals 430 provide mounting supports and electrical interconnections between the optical transceiver module 400 and the
20 planar substrate 500. Each electrical terminal 430 consists of metallic plated area on the outer surface optical transceiver module 400. The plated area includes a curved surface defining a semi-cylindrical void or arch over the planar substrate 500. Curved surface terminals of this kind are often referred to as castellated terminals.

25

The optical transceiver module 400 is surface mounted onto a major surface 550 of the planar substrate 500 using a standard reflow solder bond technique. This technique involves depositing portions of solder paste at predefined positions on the planar substrate. The optical transceiver module 400 is then positioned onto
30 the planar substrate such that the terminals 430 align with the solder paste portions. The tackiness of the solder paste ensures that the transceiver module remains in position on the substrate. The solder paste portions are then heated

until they melt and flow over the metallic terminals 430 forming a series of reflowed solder bonds or joints 440 (shown in Figure 10A).

The major surface 550 of planar substrate also includes electrically conductive 5 interconnects 510 for coupling the electrical terminals 430 on the optical transceiver module to a printed circuit board on which the optical transceiver module package 300 is mounted. Each interconnect 510 is associated with a terminal 430 of the optical transceiver module, and comprises an electrically conductive terminal 530 and a conductive trace 520. The conductive trace 520 is 10 connected at one end to the electrically conductive terminal 530 and at the other end to the solder bond 440 that attaches the terminals 430 of the optical transceiver module to the substrate 500. As shown in Figure 6, the conductive traces extend beneath the arched surfaces of the terminals 430 and, in a preferred embodiment, form enlarged tabs to which the solder can securely bond. The 15 conductive terminals 530 are castellated terminals similar to the castellated terminals 430 of the optical transceiver module.

Figure 7 illustrates how the optical transceiver module package 300 can be manufactured in large quantities from a larger substrate 600. The manufacturing 20 process involves the following steps:

- 1) Providing a large planar substrate 600;
- 2) Drilling a plurality of through-holes 610 along a series of spaced apart rows 620 on the substrate 600;
- 25) 3) Mounting optical transceiver modules 400 on the planar substrate in positions either side of the rows of holes 620; and
- 4) Cutting the planar substrate along predetermined cut lines (see dashed lines in Figure 7), including cutting through the middle of the rows 620 of drilled holes, in order to separate the substrate 600 into a plurality of optical transceiver 30 module packages 300 with each package containing a single optical transceiver module 400.

The step of separating the planar substrate into a plurality of optical transceiver module packages 300 may be referred to generally as a singularising step. The process of singularising is a technique familiar to those skilled in the art.

5 The drilling step creates cylindrically shaped holes 610 in the substrate 600 that are cut in the singularising step so as to create two sets of semi-cylindrically shaped recesses along the cut sides of the substrate 600. These recesses form the basis of the castellated terminals 530 in the optical transceiver module package 300 (see also Figure 6).

10

Typically, the optical transceiver module package 300 will be manufactured in large quantities and supplied to circuit board assemblers such as portable telephone manufacturers on carrier tape.

15 CIRCUIT BOARD ASSEMBLY

Referring to Figure 8, when it is desired to assemble the optical transceiver module package 300 onto a circuit board 700 of, for example, a portable telephone, the package 300 can be removed from the carrier tape using a pick and place machine. By taking advantage of the relatively large major surface 560 of the substrate 500 (opposite the transceiver mounting surface 550), the package 300 can be picked with relative ease and moved to the pre-assembly position shown in Figure 8. In this position, the optical transceiver module depends from the planar substrate towards a modified end portion of the circuit board 700. The circuit board 700 is modified so as to form a slot or recess 750 which is bounded by a side surface 710 of the board on three side leaving a fourth side open.

Referring also to Figures 9, 10A and 10B, final assembly of the circuit board involves lowering the substrate 500 of the optical transceiver module package 300 onto a major surface 720 of the circuit board and soldering the terminals 530 of the substrate 500 to the major surface 720. In this assembled position, the optical transceiver module 400 is situated in the recess 750 of the circuit board adjacent the side surface 710 of the circuit board, with the transceiver lenses 410, 420

facing outwards from the fourth open side of the recess 750. Also in this assembled position, the planar substrate 500 lies parallel with the circuit board 700, with the optical transceiver module 400 and the circuit board 700 adjacent the same major surface 550 of the substrate. Furthermore, the portion of the substrate 500 that supports the transceiver module 400 extends beyond the side surface 710 of the circuit board 700 and covers the recess 750.

The terminals 530 of the planar substrate 500 are soldered to the major surface 720 of the circuit board using the standard reflow solder bond technique referred to earlier. Again, this technique involves depositing portions of solder paste at predefined positions on the circuit board surface 720. The planar substrate 500 is then positioned onto the circuit board such that the terminals 530 align with the solder paste portions. The tackiness of the solder paste ensures that the planar substrate 500 remains in position on the circuit board. The solder paste portions are then heated until they melt and flow over the metallic terminals 530 forming a series of reflowed solder bonds or joints 540 (shown in Figure 10A). Suitably, the solder joints 540 electrically couple the interconnects 510 on the planar substrate 500 to appropriate conductive terminals and traces on the circuit board so that the optical transceiver can function correctly.

A particular advantage associated with the circuit board assembly of Figure 9, 10A and 10B is the amount by which the optical transceiver module extends from the circuit board surface. A typical prior art optical transceiver module attached directly to a circuit board would extend by the height of the module H. However, in the present circuit board assembly, the optical transceiver module lies in a recess 750 of the circuit board and only extends from the circuit board surface 730 by an amount E equal to the difference between the absolute height of the module H and the thickness of the circuit board T. Thus, the effective height of the optical transceiver module is reduced relative to the prior art by the thickness of the circuit board T. Typically, the transceiver module will have a height dimension H of between 2.5 mm and 4 mm, and the circuit board thickness will be approximately 1mm. The effective height of the transceiver module can therefore be reduced by approximately 25 to 40 percent.

A minor drawback with this assembly is that the substrate 500 extends from an opposite surface 720 of the circuit board by an amount equal to the thickness of the substrate M. To counter this drawback, the thickness of the substrate 500 can

5 be minimised to a thickness of, for example, 0.2 to 0.5mm. However, in most circuit board assemblies, such as those used in portable telephones, components of up to 1mm in height are mounted on both sides of the board. Accordingly, the height of the substrate from the surface 720 will generally not exceed that of the components and will not therefore be a drawback.

10

Surface mounting is used extensively in the present embodiment to assemble the circuit board and optical transceiver module. Surface mount technology (SMT) is both fast and accurate during production and provides reliable and durable connections post-production. The use of this technology therefore provides

15 additional advantages over prior art devices which use other technologies, such as leadframe packaging. Leadframe packages are more susceptible to co-planarity problems during circuit board assembly and tend to fail when subject to harsh physical shocks often applied by users of portable electronic equipment.

20

It will be evident in view of the foregoing that various modifications may be made within the scope of the present invention. For example, the optical transceiver module and the planar substrate may be mounted using leaded pin, ball grid array, or any other suitable mounting technology. Furthermore, the optical transceiver

25 module package may be mounted on a side portion rather than recessed end portion of a circuit board.

1 **CLAIMS**

2

3 1. A circuit board assembly comprising;
4 a planar circuit board having a major surface and a side surface,
5 a planar substrate mounted on the major surface of the circuit board, an
6 extended portion of the planar substrate extending beyond the side surface, and
7 an optical transceiver module mounted on the extended portion of the
8 substrate adjacent the side surface of the printed circuit board.

9

10 2. An assembly as claimed in claim 1, wherein the planar circuit board
11 includes an end portion defining a recess in which the optical transceiver module
12 is disposed.

13

14 3. An assembly as claimed in claim 1, wherein the planar substrate includes
15 electrically conductive interconnects for coupling electrical terminals on the optical
16 transceiver module with electrical terminals on the planar circuit board.

17

18 4. An assembly as claimed in claim 1, wherein the planar substrate and the
19 planar circuit board are substantially parallel.

20

21 5. An assembly as claimed in claim 1, wherein the planar substrate is soldered
22 onto the major surface of the planar circuit board.

23

24 6. An assembly as claimed in claim 1, wherein the optical transceiver module
25 is soldered onto the extended portion of the planar substrate.

26

27 7. An assembly as claimed in claim 1, wherein the optical transceiver module
28 is mounted on, and the major surface of the planar circuit board faces a same side
29 of the planar substrate.

30

31

32 8. A method of manufacturing a circuit board assembly comprising:
33 providing a planar substrate,

1 mounting an optical transceiver module on a first portion of the
2 planar substrate, and

3 mounting a second portion of the planar substrate on a major surface of a
4 circuit board such that the optical transceiver module is disposed adjacent a side
5 surface of the planar circuit board.

6

7 9. A method as claimed in claim 8, further comprising:
8 singularising the planar substrate from a relatively larger planar substrate.

9

10 10. A circuit board assembly comprising;
11 a planar circuit board having a major surface, and a side surface defining a
12 recess,

13 a planar substrate mounted on the major surface of the circuit board, an
14 extended portion of the planar substrate extending over the recess, and
15 an optical transceiver module mounted on the extended portion of the
16 substrate so as to be disposed in the recess.

17

18 11. An optical transceiver module package for mounting on a planar circuit
19 board having a major surface and a side surface, the major surface provided with
20 electrical terminals, the optical transceiver module package comprising:

21 a planar substrate for mounting on the major surface of the circuit board so
22 that an extended portion of the planar substrate extends beyond the side surface,

23 an optical transceiver module provided with electrical terminals and
24 mounted on the extended portion of the substrate adjacent the side surface of the
25 printed circuit board, and

26 electrically conductive interconnects associated with the planar substrate
27 for coupling the electrical terminals on the optical transceiver module with
28 electrical terminals on the planar circuit board.

29

30 12. An optical transceiver module package for mounting on a planar circuit
31 board having a major surface and at least one side surface defining a recess, the
32 major surface provided with electrical terminals, the optical transceiver module
33 package comprising:

1 a planar substrate for mounting on the major surface of the
2 circuit board so that an extended portion of the planar substrate extends over the
3 recess, and

4 an optical transceiver module provided with electrical terminals and
5 mounted on the extended portion of the substrate so as to be disposed in the
6 recess, and

7 electrically conductive interconnects associated with the planar substrate
8 for coupling the electrical terminals on the optical transceiver module with
9 electrical terminals on the planar circuit board.

10

11


ABSTRACT**CIRCUIT BOARD ASSEMBLY**

5

A circuit board assembly comprising a circuit board with a recessed end portion, and an optical transceiver module mounted on a daughter board. The daughter board is mounted on the circuit board so that a portion of the daughter board extends over the recess of the circuit board. The optical transceiver module mounted on the daughter board is then positioned in the recess of the circuit board.


10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000

Fig. 1

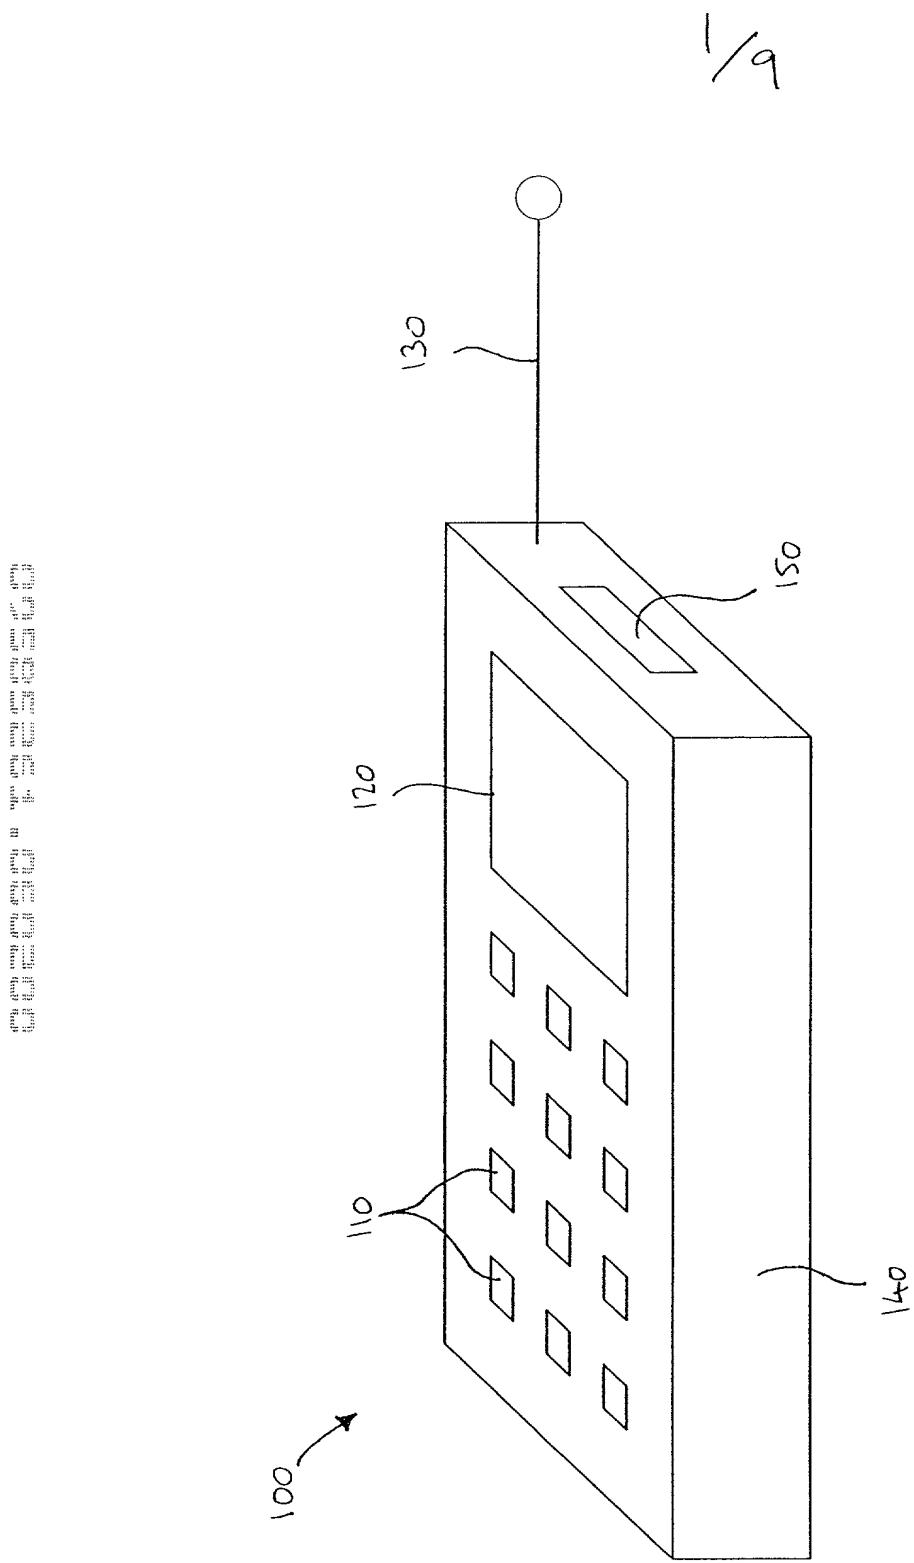

2/9

Fig. 2

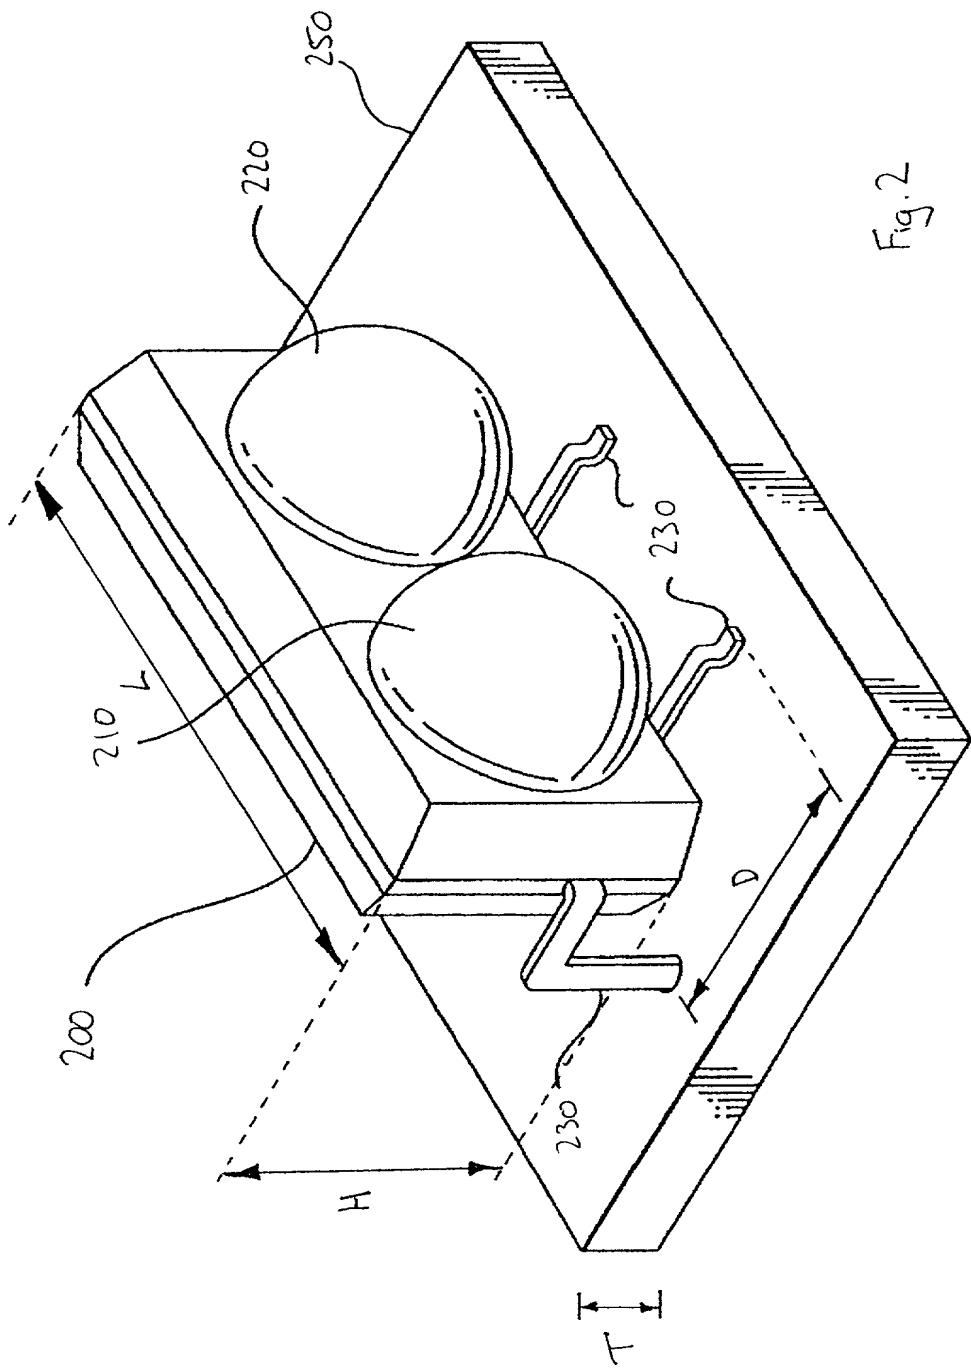

3/9

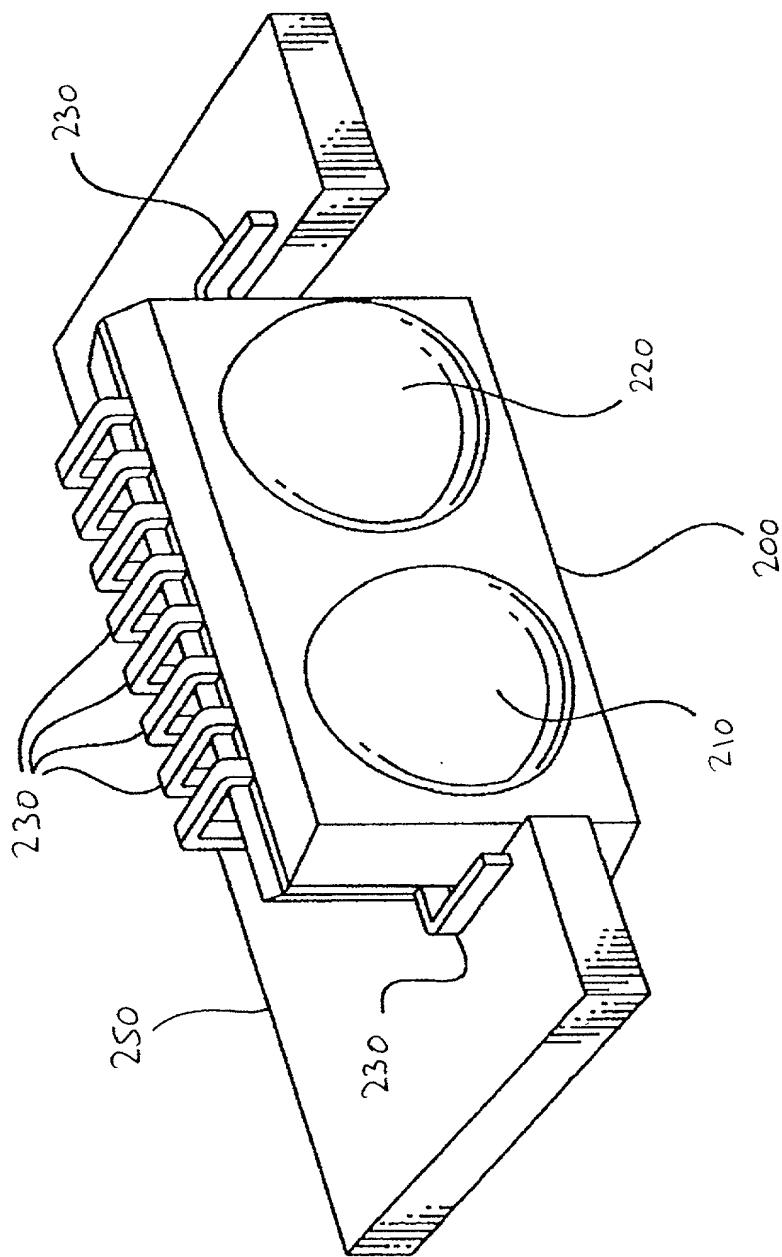


Fig. 3

4/9

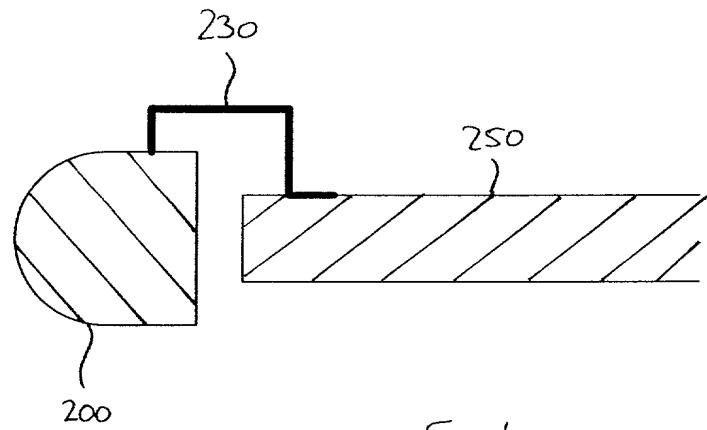


Fig. 4

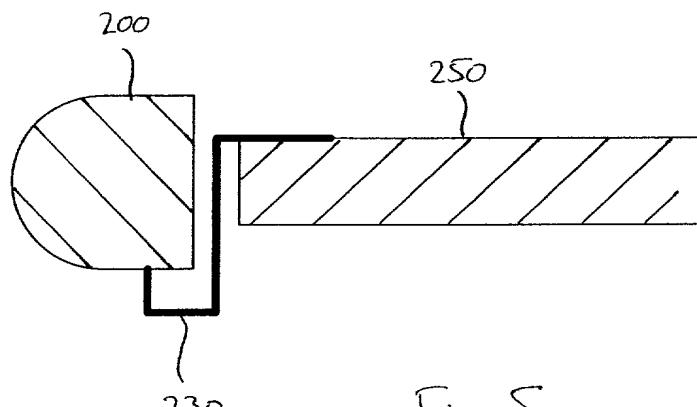


Fig. 5

5/9


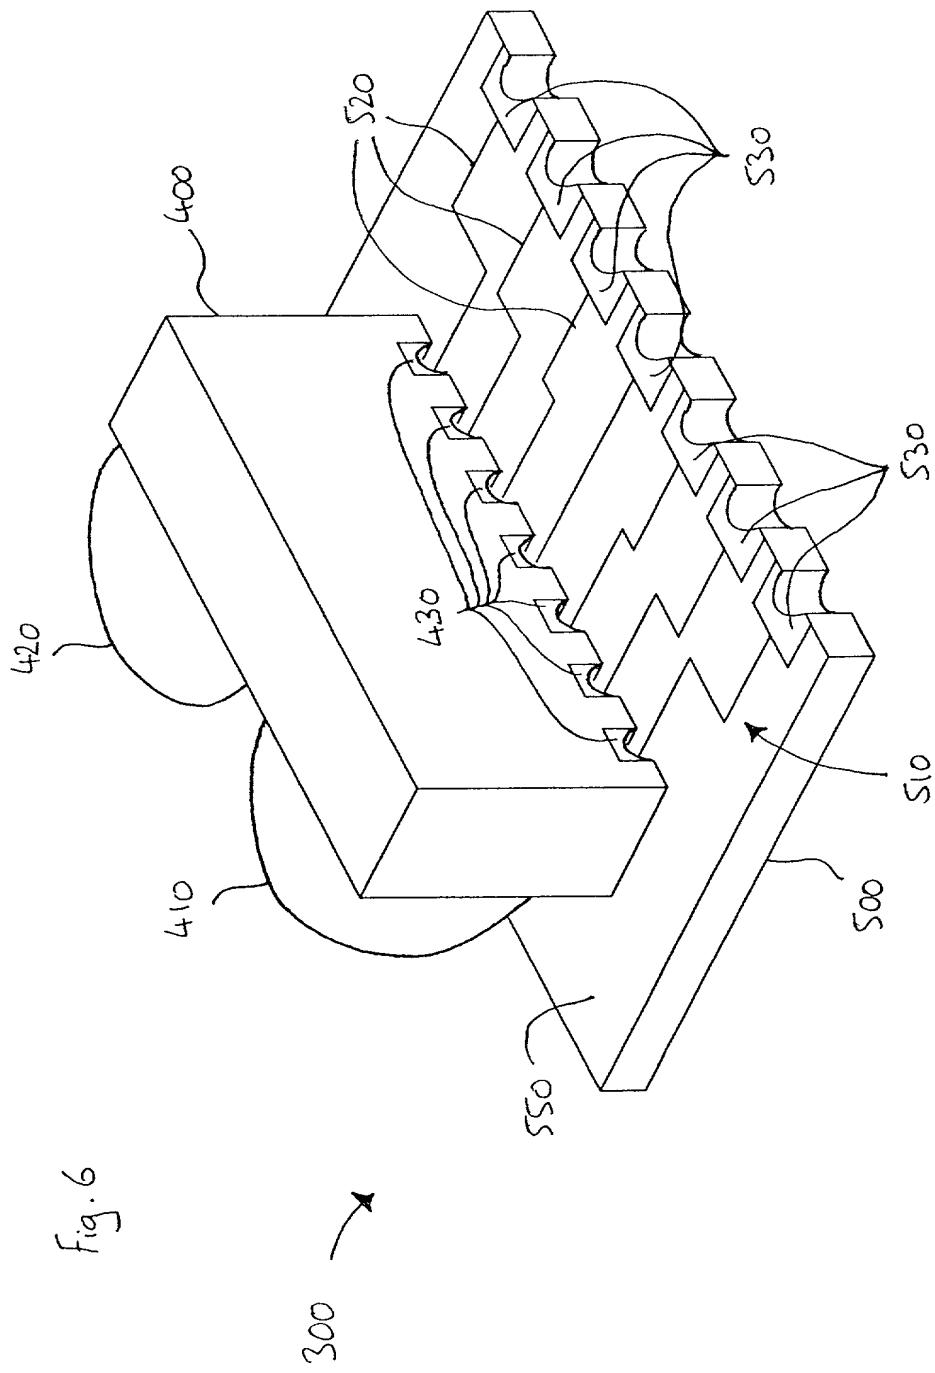



Fig. 6

6/9


Fig. 7

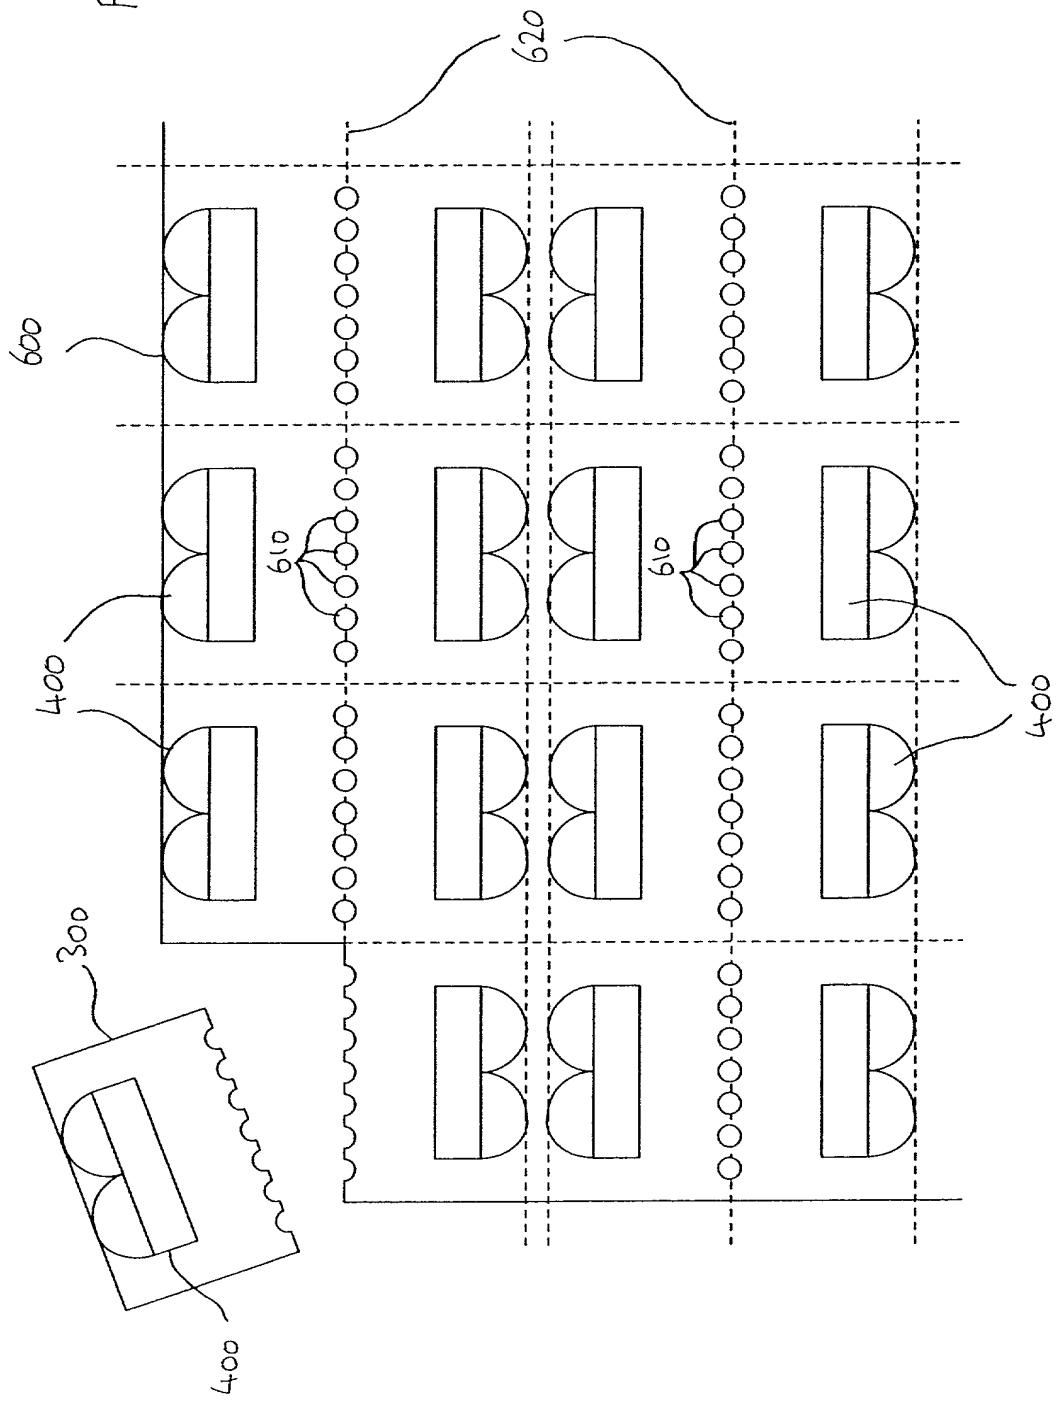

7/a

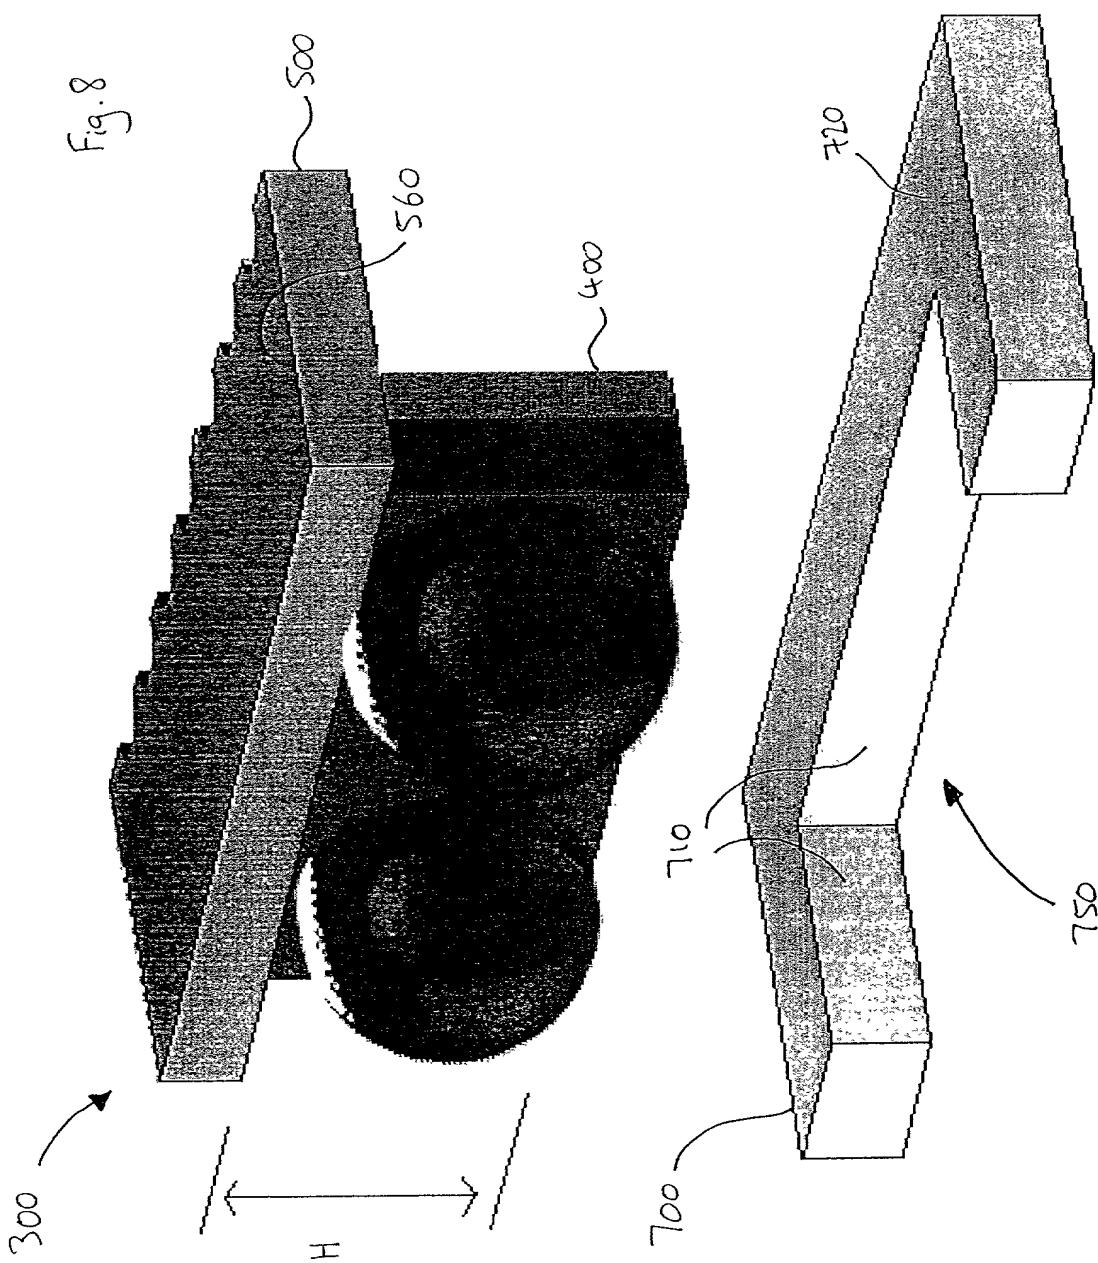

8/9

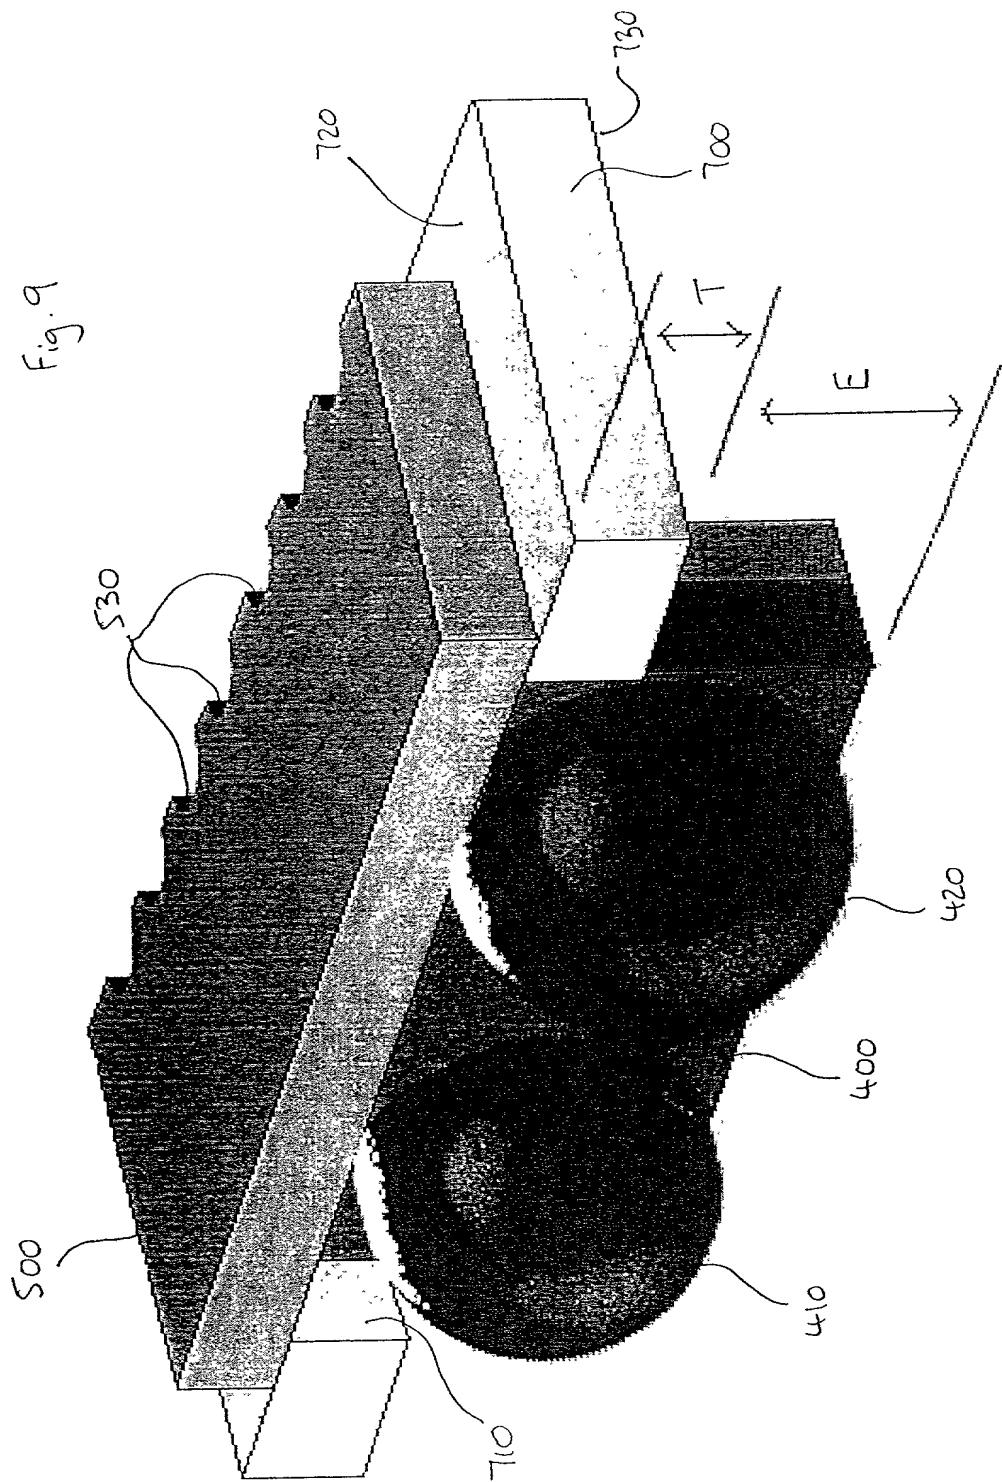

σ_{ij}

He was a man of great energy and a strong leader, but he was also a man of great pride and a strong-willed leader.

9 / 9


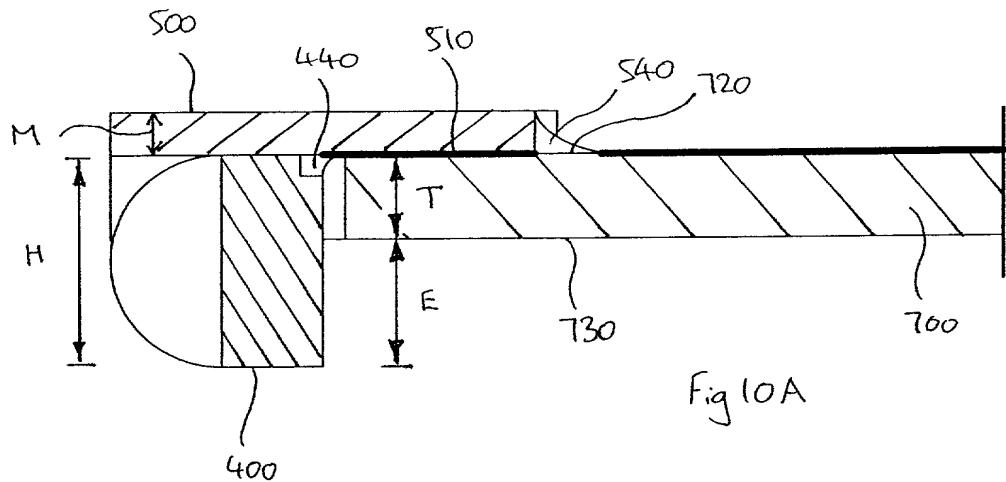


Fig. 10A

Fig. 10B

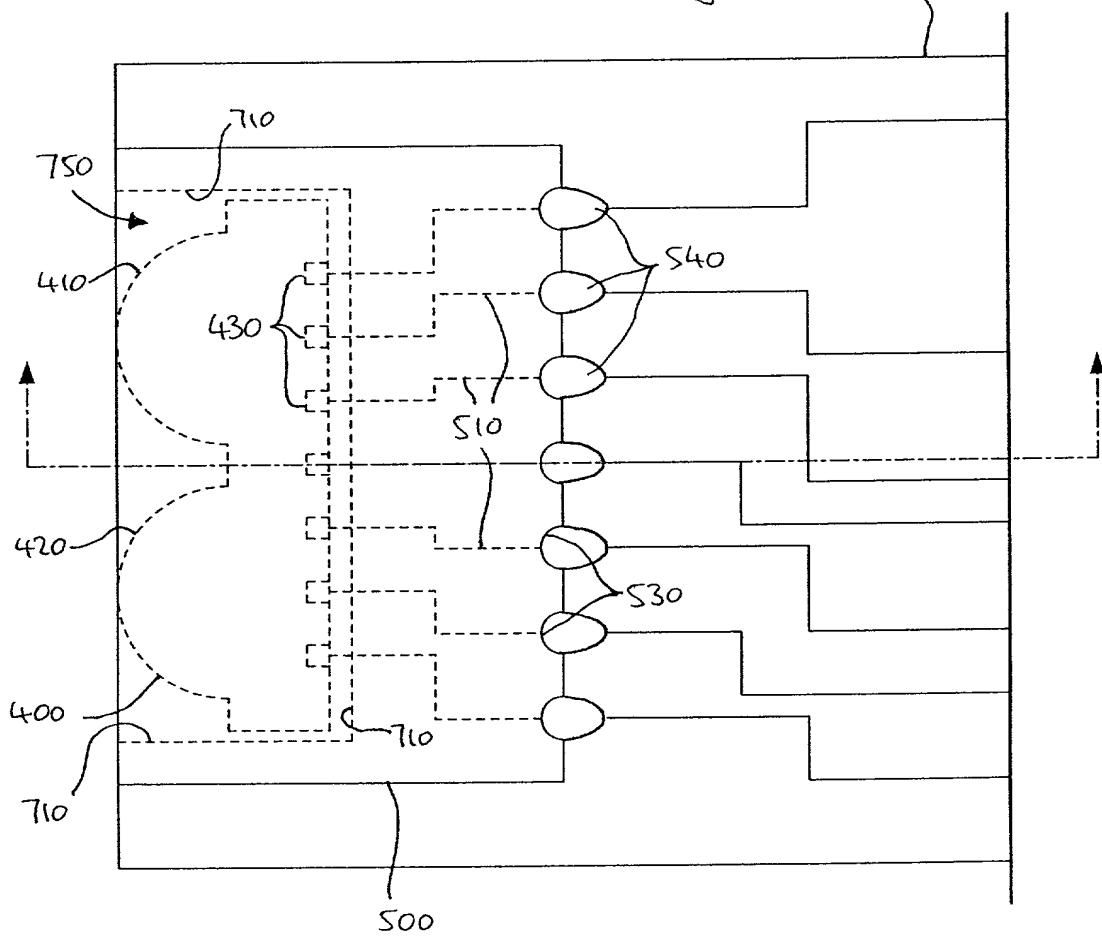

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATIONATTORNEY DOCKET NO. 70990046-2

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Circuit Board Assembly

the specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U S C 119
Singapore	20000573-6	2/22/2000	YES <input checked="" type="checkbox"/> NO _____
			YES _____ NO _____

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

U. S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Customer Number **022878**Place Customer
Number Bar Code
Label here


Send Correspondence to:

AGILENT TECHNOLOGIES
Legal Department, 51UPD
Intellectual Property Administration
P.O. Box 58043
Santa Clara, California 95052-8043

Direct Telephone Calls To:

Herbert R. Schulze
(650) 857-4377

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: **Kah Phang LOH** Citizenship: **MY**Residence: **Blk 103A Depot Road #04-545 Singapore 101103**Post Office Address: **Same as residence**Inventor's Signature 26 May 2000
Date